TECHNICAL SHEET MULTI-RISK



Date: 03/02/2015

PRODUCT DESCRIPTION

THOR TROUSERS

Material: 78% Cotton, 20% Polyester 2% Antistatic




























| | SIZE | | | | | | |
|--|-----------------------|---------------|--|--|--|--|--|
| | THOR TROUSERS NAVY | Windless Same | | | | | |

| 8MTHTNS | 8MTHTNM | 8MTHTNL | 8MTHTNXL | 8MTHTNXXL | 8MTHTNXXXL |
|----------|----------|----------|-----------|------------|-------------|
| 40 / 42 | 44 / 46 | 48 / 50 | 52 / 54 | 56 / 58 | 60 / 62 |
| S | M | L | XL | XXL | XXXL |

PACKING









10 Pieces In 1 Carton


TECHNICAL SHEET MULTI-RISK




DESIGN & TECHNICITY

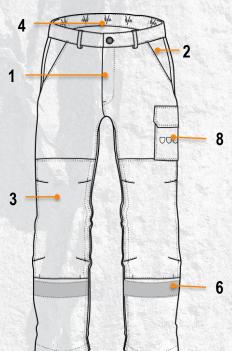

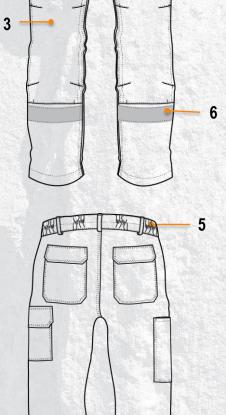

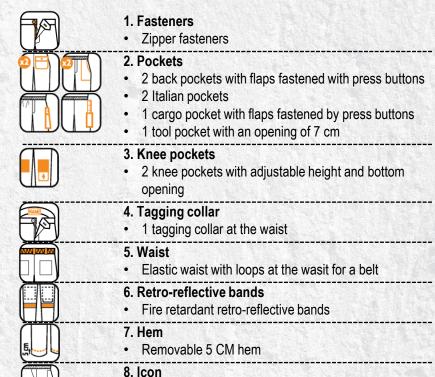



| | | XS | | S | | м | | L | | XL | | XXL | | XXXL | | XXXXL | | | |
|-----------------|---|-----|----|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|-------|-----|---|--|
| | | 0 | | 0 | | 1 | | 2 | | 3 | | 4 | | 5 | | 6 | | 7 | |
| | | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | 52 | 54 | 56 | 58 | 60 | 62 | 64 | 66 | | |
| | A | 81 | 88 | 89 | 96 | 97 | 104 | 105 | 112 | 113 | 120 | 121 | 128 | 129 | 136 | 137 | 144 | | |
| | В | 69 | 76 | 77 | 84 | 85 | 92 | 93 | 100 | 101 | 108 | 109 | 116 | 117 | 124 | 125 | 132 | | |
| Section Section | С | 85 | 92 | 93 | 100 | 101 | 108 | 109 | 116 | 117 | 124 | 125 | 132 | 133 | 140 | 141 | 147 | | |
| | D | 78 | | 80 80 | | 82 | | 82 | | 84 | | 84 | | 86 | | | | | |
| | E | 5 5 | | | 5 | 5 | | 5 | | 5 | | 5 | | 5 | | | | | |

· Icons for the standards on the flap of the cargo pocket

TECHNICAL SHEET MULTI-RISK





The XComfort is a range based on flame retardant solution that gives the cotton fiber fabrics a durable flame retardant finish.

This flame retardant finish is not a coating, it is a chemical bonding with the molecular structure of natural cotton. In the event that the fabric is exposed to fire a carbon char is formed, this carbon char works as a heat shield and also controls the spread of the flame.

This fabrics offer its users a superior comfort Its inherent softness is enhanced by its ability to keep the wearer cool in hot climates, and warm in cold.

STANDARDS

This article is in conformity with the model of individual safety equipment which correspond to

The CE Type-examination certificate n° 0161/3850/14
Delivered by AITEX (notified body n° 0161)

EN ISO 11612: 2008 A1, B1, C1, E3, F1

- Limited flame spread = A1
- Insulation against convective heat = B1
- Insulation against radiant heat = C1
- Insulation against the iron spatter = E3
- Insulation against contact heat = F1

EN ISO 11611:2007 Class 1 - A1



(A1) against burns from welding and similar processes (Class 1) = Class 1 – A1

IEC 61482-2:2009 Class 1 – 4kA



 Against the risk of burn provoked by an electrical arch = 4kA (Class 1)

EN 13034: 2005+A1:2009 Type PB6



Clothes standardized type 6 protect users at least cover torso and limbs = Type PB6

(**Type 6** with jacket and trouser together)

EN 1149-5: 2008



Against the risk of accumulation of electrostatic loads

EN 14404: 2004+A1:2010 Type 2



Mechanical protection for users working in knees position = **Type 2**

This model is in standard EN

This model is in conformity with the standard EN 13688 : 2013

Washing instructions*:



* Consult the manufacturer before any operation