

3M 6059 Cartridge Filter

3M™ 6059 Cartridge Filter Multi Gas: Organic Vapours / Acid Gases / Ammonia & Methylamine, is one of the 3M 6000 series of filters that are applicable for use in a range of gas/vapour environments. With the appropriate particulate filter added, protection against particulates can also be obtained.

Bayonet Fitting


- + Ensures precise & safer locking
- + Low breathing resistance

3M High Performance Filter Media

- + Good balance of weight on face
- + Excellent field of vision as a result of unique trapezoidal shape

Versatile

- + Can be used on all 3M 6000, 3M 7000 & 3M 7500 Series Half Masks & Full Face Masks.

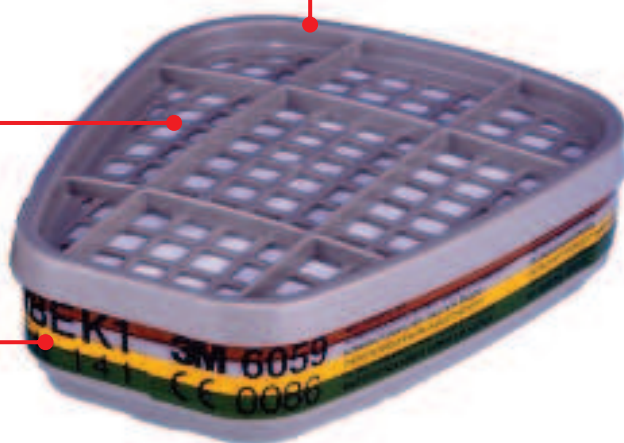

Efficiency and Protection Factor

If there is a need for particulate protection, fitting of 3M particle filter - P2 (3M 5925) or P3 (3M 5935) and the 501 retainer over the 6059 will give a combination multi gas / particulate filter.

Specifications

The 3M 6059 Filter has been tested & meets the specifications to EN 14378 Class A1B1E1K1 gas/ vapour filter when used with compatible 3M respirators.

For use in of organic vapours, inorganic, acid gases & ammonia.


Half Mask Respirators-up to 10 x Workplace Exposure limit (WEL) or 1000ppm whichever is lower.

Full Mask Respirators-up to 20 x Workplace Exposure limit (WEL) or 1000ppm whichever is lower.

Can be combined with P2 (5925) or P3 (5935) for particulate protection.

Typical Applications

The 6059 filter can be used in industries where excess levels of a variety of organic vapours / inorganic gases / acid gases / ammonia & methylamine are present in the workplace atmosphere.

 For additional information and limitations of use please refer to 3M6059 data sheets. Specifications may change without prior notification

Suitable for use with



All 3M 6000 Full Face Masks



All 3M 6000 Half Masks



All 3M 7500 Half Masks