




Temple	Polycarbonate
Lens	Polycarbonate, thickness: 2,2 mm
Weight	45 g

Reference	Frame Colour	Lens Colour	Features	Frame Marking	Lens Marking	Lens Norms
 60400	Clear	Clear	Hard coated	FT	2-1,2 1FTK	EN 170
 60401	Clear	Clear	Low energy impact	FT	2-1,2 1FT	EN 170
 60403	Smoke	Smoke	Hard coated	FT	5-3,1 1FTK	EN 172
 60404	Dark smoke	Dark smoke	Hard coated	FT-CAT.4	5-4,1 1FTK	EN 12312 EN172
 60405	Green	IR5	Hard coated	F	5 1FK	EN 169
 60411	Clear	Clear	Hard coating	FT	1FT	EN 170

Packaging & Storing

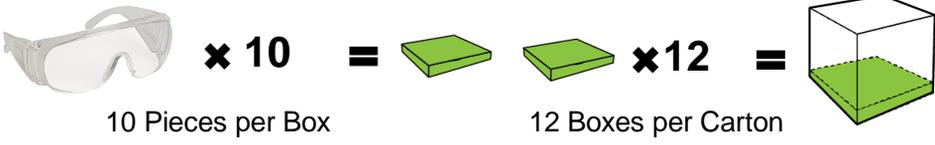

Always transport and store in the original packaging. Store in a dry place, away from direct sunbeam.

120 Pieces in 1 Carton

Product Standards



This article is in conformity with the model of individual safety equipment which correspond to

**The CE Type-examination certificate n° 0776
Delivered by INSPEC (notified body n° 0194)**



This model is in conformity with the standard EN 166:2001

General Norms & Explanation

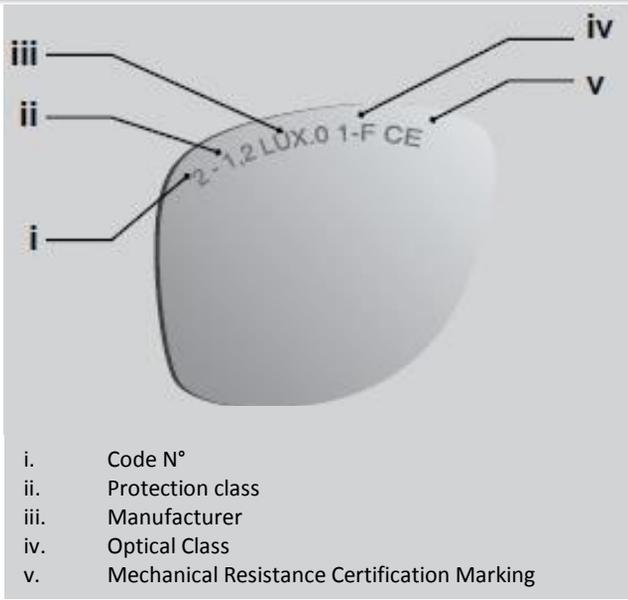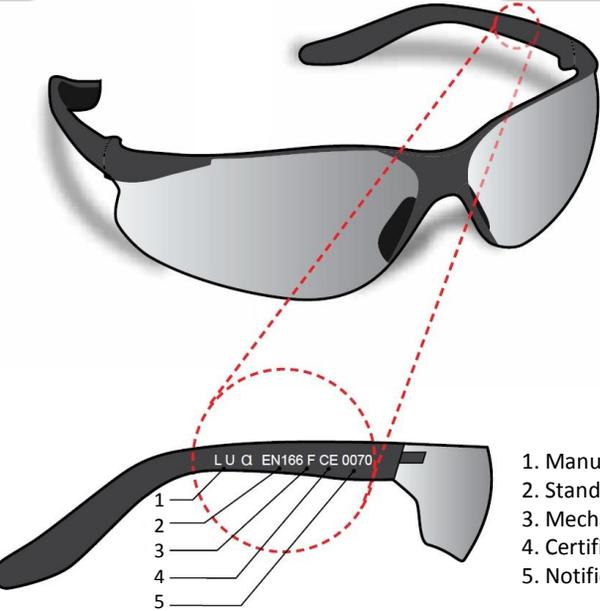

EN 166	Specification (optical quality, resistance to usual and mechanical risks and to impacts)
EN 169	Welding Filters
EN 170	Ultraviolet filters
EN 172	Sunglare filters for industrial use
EN 175	Welding equipments
EN 379	Welding filters with variable shade or dual shade
EN 1731	Mesh faceshield
EN 12312-1	Sunglasses and related eyewear : Sunglasses for general use

Temperature between -5° (± 2°) & 55° (± 2°)	T
Hard coated lens	K
Anti-fog coated lens	N
Protection against liquids	3
Enhanced solidity	S
Protection against big dusts	4